


### Recessed Ceiling Mounted (R)



#### Dimensions (mm)

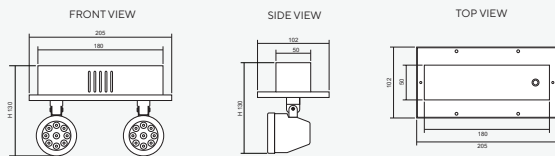


### Product Overview

The Remote Lamp model RCD Series (Double Lamp) is available in three installation types: recessed, ceiling, or wall-mounted. This lamp allows you to adjust the direction of the light in two ways, to the left and right, with an approximate range of 180 degrees. It can also be tilted up and down at an angle of about 45 degrees in practical installation. It works in conjunction with LED MR16 GU5.3 bulbs and receives electrical power from the Central Battery Systems, which operate at 220VAC. In the event of a power outage, it provides emergency lighting for safety purposes.

### Surface Ceiling Mounted (C)



#### Dimensions (mm)

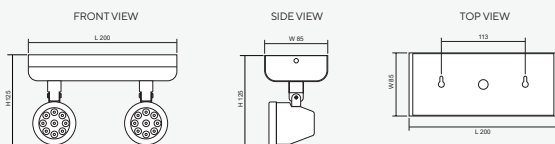

### Technical Specifications

Operating Temperature	10 to 50°C
Input Voltage	220 - 240VAC / 50Hz
LED Lamp Power	9W / Bulb
Luminous Intensity	810 lm / Bulb
Bulb Type	LED MR16
Base	GU5.3
Color Temperature	Warm White (3000K ± 250K) Daylight (6000K ± 250K)
Color Rendering Index	>80
Lamp Life Time	50,000 Hrs
Rated Beam Angle	50Deg
Degree of Protection	IP20
Dimension LxWxH	- Recessed Ceiling 205 x 102 x 130 mm - Surface Ceiling 200 x 85 x 125 mm - Surface Wall 200 x 76 x 155 mm
Material	Electro-galvanized steel sheet 1mm. thick with epoxy powder coating
Weight	- Recessed Ceiling 0.82 Kg - Surface Ceiling 0.71 Kg - Surface Wall 0.73 Kg
Hole cut LxW	- Recessed Ceiling L185 x W55 mm - Surface Ceiling - - Surface Wall -
Mounted	Recessed / Surface Ceiling / Surface Wall

### Surface Wall Mounted (W)



#### Dimensions (mm)

