

Sealed Lead Acid Rechargeable Battery

SN12-6 6Volt 12Ah

Specifications

Nominal Voltage(V) 6V

Nominal Capacity

20 hour rate	(0.6A to 5.25V)	12Ah
10 hour rate	(1.14A to 5.25V)	11.4Ah
5 hour rate	(2.04A to 5.1V)	10.2Ah
1 C	(12A to 4.8V)	6.8Ah
3 C	(36A to 4.8V)	4.8Ah

Weight Approx. 1.84Kg(4.05Lbs.)

Internal Resistance (at 1KHz) Approx. 6mΩ

Maximum Discharge Current for

5 seconds: 180A

Charging Methods at 25 °C (77 °F)

Cycle use:

Charging Voltage 7.20 to 7.50V

Coefficient -5.0mV/°C/cell

Maximum Charging Current: 3.6A

Standby use:

Float Charging Voltage 6.75 to 6.90V

Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge -15 °C (5 °F) to 40 °C (104 °F)

Discharge -15 °C (5 °F) to 50 °C (122 °F)

Storage -15 °C (5 °F) to 40 °C (104 °F)

Charge Retention (shelf life) at 20 °C(68 °F)

1 month 92%

3 month 90%

6 month 80%

Case Material ABS UL94 HB




Option: Flammability resistance of (UL94 V-0)

Terminal F1 or F2 (Faston Tab 187 or 250)




Dimensions


mm(inch)

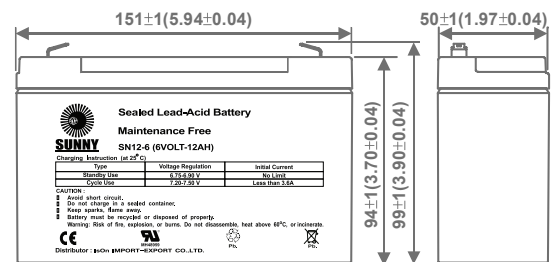


(V) FOR 6V BATTERY Discharge Time VS. Discharge Current (25 °C)

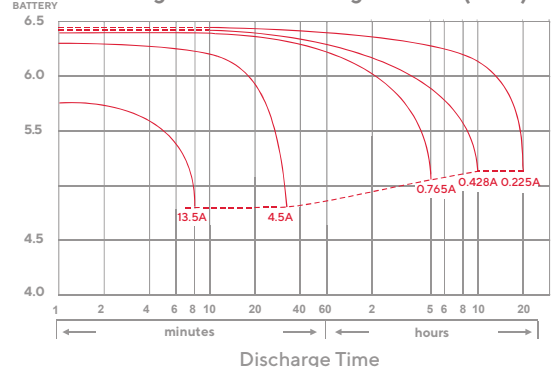


Effect of Temperature on Capacity 25 C(7 F)

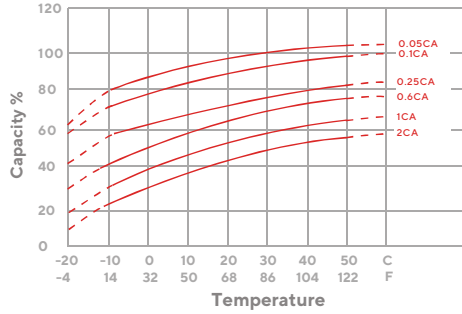


Capacity Retention Characteristic

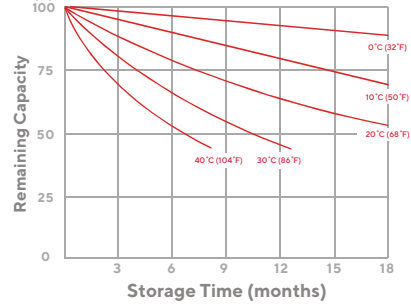

Trickle (or float) Service Life



Cycle Service Life

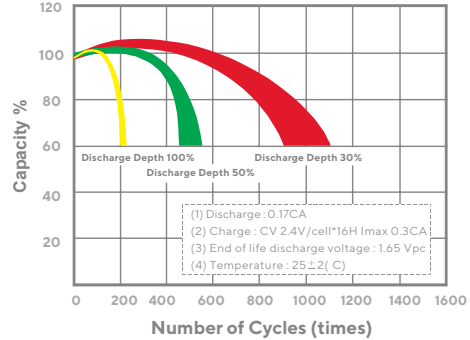

PERFORMANCE DATA

- Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	72.5	77.9	80.3	81.9	84.0	85.7	87.5
10	min	47.7	52.4	54.0	55.1	56.8	57.5	58.9
15	min	39.5	41.5	42.8	43.7	45.0	45.9	46.2
30	min	22.2	24.0	24.7	25.2	26.5	27.0	27.4
60	min	13.5	14.4	14.8	15.1	15.4	15.7	15.9
120	min	7.85	8.51	8.77	8.95	9.01	9.29	9.40
180	min	5.88	5.95	6.35	6.37	6.40	6.45	6.58
240	min	4.75	4.80	4.85	4.87	4.92	4.94	4.98
300	min	3.92	4.15	4.28	4.32	4.35	4.40	4.44
600	min	2.10	2.21	2.28	2.33	2.39	2.44	2.47
1200	min	1.09	1.20	1.23	1.26	1.31	1.35	1.39

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	39.5	41.2	44.3	45.2	46.7	47.1	47.8
10	min	27.1	30.0	31.8	32.4	33.1	33.4	33.7
15	min	20.2	21.0	22.3	22.4	23.2	23.4	23.6
30	min	12.0	12.3	13.0	13.5	13.7	13.8	14.1
60	min	7.32	7.56	8.02	8.18	8.34	8.42	8.45
120	min	3.95	4.15	4.40	4.49	4.58	4.62	4.66
180	min	2.95	3.00	3.11	3.17	3.24	3.26	3.29
240	min	2.30	2.33	2.47	2.52	2.57	2.59	2.62
300	min	1.85	1.95	2.07	2.11	2.15	2.17	2.21
600	min	1.13	1.16	1.20	1.22	1.25	1.26	1.31
1200	min	0.610	0.617	0.630	0.645	0.665	0.670	0.692

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $\geq X > 60\text{min}$ (+5%~-5%)