

Sealed Lead Acid Rechargeable Battery

SN7-12 12Volt 7Ah

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(0.35A to 10.50V)	7Ah
10 hour rate	(0.665A to 10.50V)	6.65Ah
5 hour rate	(1.19A to 10.20V)	6.12Ah
1 C	(7A to 9.60V)	4.08Ah
3 C	(21A to 9.60V)	2.88Ah
15 min rate	(168A to 9.60V)	42Wh

Weight Approx. 2.2Kg(4.84Lbs.)

Internal Resistance (at 1KHz) Approx. 19mΩ

Maximum Discharge Current for

5 seconds: 105A

Charging Methods at 25 °C (77 °F)

Cycle use:

Charging Voltage 14.4 to 15V

Coefficient -5.0mV/°C/cell

Maximum Charging Current: 2.1A

Standby use:

Float Charging Voltage 13.5 to 13.8V

Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge -15°C (5°F) to 40°C (104°F)

Discharge -15°C (5°F) to 50°C (122°F)

Storage -15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20 °C(68 °F)

1 month 92%

3 month 90%

6 month 80%


Case Material ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)


Terminal F1 or F2 (Faston Tab 187 or 250)




Dimensions mm(inch)




F1
(Faston Tab 187)




F2
(Faston Tab 250)

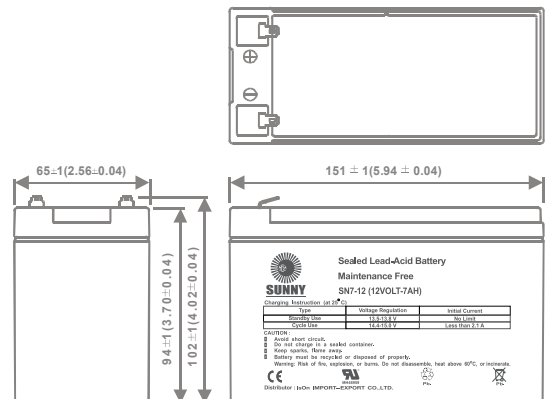


Discharge Time VS. Discharge Current (25 °C)

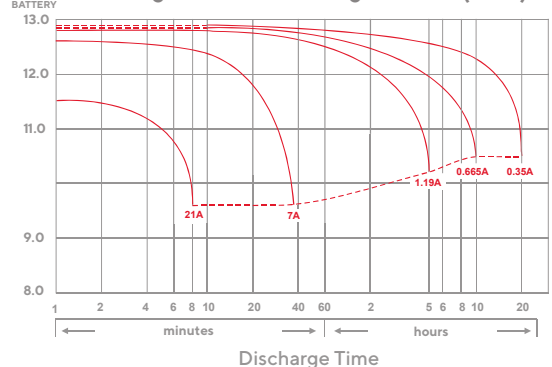


Effect of Temperature on Capacity 25 C(7 F)

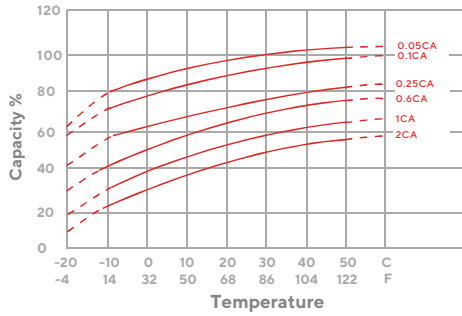


Capacity Retention Characteristic

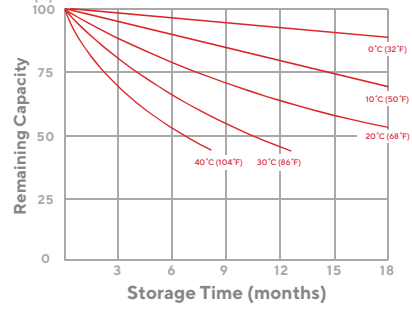

Trickle (or float) Service Life



Cycle Service Life

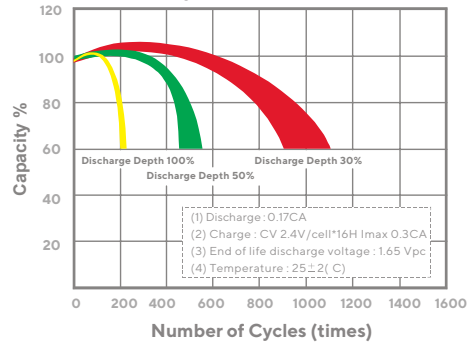

PERFORMANCE DATA

- Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	43.8	47.0	49.0	51.0	51.8	52.8	54.3
10	min	30.0	31.8	33.2	34.3	34.8	35.5	36.5
15	min	24.0	25.2	25.8	26.5	26.8	27.3	28.0
30	min	12.1	12.9	13.6	14.1	14.3	14.4	14.6
60	min	7.70	8.38	8.63	8.87	8.97	9.08	9.23
120	min	4.10	4.52	4.72	4.92	4.98	5.07	5.20
180	min	3.08	3.32	3.48	3.62	3.67	3.72	3.80
240	min	2.85	2.93	3.00	3.05	3.07	3.10	3.15
300	min	2.47	2.53	2.58	2.62	2.63	2.65	2.68
600	min	1.36	1.40	1.42	1.43	1.44	1.44	1.45
1200	min	0.690	0.705	0.718	0.728	0.732	0.737	0.743

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	23.1	26.2	27.8	29.1	29.6	30.5	31.7
10	min	16.1	17.3	18.1	18.6	18.9	19.2	19.8
15	min	12.6	13.1	13.5	13.8	14.0	14.1	14.3
30	min	6.54	7.05	7.28	7.47	7.56	7.68	7.85
60	min	4.02	4.25	4.41	4.52	4.58	4.63	4.71
120	min	2.26	2.38	2.45	2.49	2.51	2.54	2.57
180	min	1.65	1.74	1.79	1.82	1.83	1.85	1.88
240	min	1.35	1.40	1.44	1.47	1.49	1.51	1.53
300	min	1.10	1.16	1.21	1.25	1.27	1.28	1.29
600	min	0.667	0.675	0.682	0.687	0.690	0.694	0.698
1200	min	0.339	0.346	0.350	0.353	0.355	0.357	0.359

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $\geq X > 60\text{min}$ (+5%~-5%)