


### Recessed Ceiling Mounted (R)




Dimensions (mm)

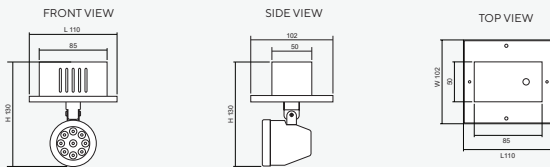

### Surface Ceiling Mounted (C)




Dimensions (mm)

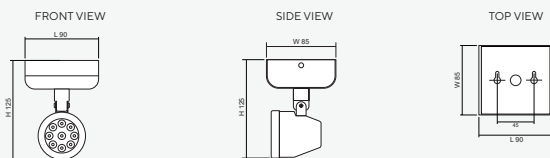

### Surface Wall Mounted (W)



Dimensions (mm)

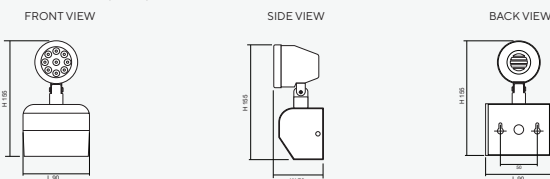

### Product Overview

โคม Remote Lamp ชนิดติดตั้งแบบ ฝังฝ้า/ติดลอย/ติดผนัง รุ่น RCD Series (Single Lamp) ดวงโคมสามารถปรับทิศทางของลำแสงได้สองแบบคือ ในทิศทางซ้าย/ขวา สามารถปรับได้ประมาณ 180 องศา และ มุมก้มเงยสามารถปรับได้ประมาณ 45 องศา ในลักษณะ-การติดตั้งใช้งานจริง โดยทำงานร่วมกับ หลอด LED MR16 GU5.3 และรับพลังงานไฟฟ้าจากระบบตู้ควบคุมไฟฟ้าแสงสว่างฉุกเฉิน Central Battery Systems ขนาด 220VAC กรณีไฟฟ้าดับจะให้แสงสว่างฉุกเฉินเพื่อการหนีภัย

### Technical Specifications

Operating Temperature	10 to 50°C
Input Voltage	220 - 240VAC/ 50Hz
LED Lamp Power	12W
Luminous Intensity	1,080 lm
Bulb Type	LED MR16
Base	GU5.3
Color Temperature	Warm White (3000K ± 250K) Daylight (6000K ± 250K)
Color Rendering Index	>80
Lamp Life Time	50,000 Hrs
Rated Beam Angle	50Deg
Degree of Protection	IP20
Dimension LxWxH	- Recessed Ceiling 110 x 102 x 130 mm - Surface Ceiling 90 x 85 x 125 mm - Surface Wall 90 x 76 x 155 mm
Material	Electro-galvanized steel sheet 1mm. thick with epoxy powder coating
Weight	- Recessed Ceiling 0.44 Kg - Surface Ceiling 0.36 Kg - Surface Wall 0.38 Kg
Hole cut LxW	- Recessed Ceiling L90 x W55 mm - Surface Ceiling - - Surface Wall -
Mounted	Recessed/ Surface Ceiling/ Surface Wall